

## TEMPERATURE MAINTENANCE SYSTEMS

### FTTH - FTTH/T - FTTH/I - FTTH/TF Fluoropolymer insulated constant power cables



#### Characteristics

- Welded contact points.
- Hard-wearing and flexible.
- Can be cut to length on site.
- Extremely simple termination.
- Cold tail incorporated: no extra connection necessary.
- Available as 20, 30 or 40 W/m.
- Power supply: 230 V as standard (400 V on request).
- **FTTH** : fluoropolymer insulated constant power cables.
- **FTTH/T** : with tinned copper braid for mechanical protection and earthing.
- **FTTH/I** : with stainless steel braid for mechanical protection and earthing.
- **FTTH/TF** : with tinned copper braid and fluoropolymer anti-corrosion outer sheath.

#### Applications

The FTTH range is particularly suitable for maintaining temperatures of up to +150°C.


Their fluoropolymer insulation endows them with the ability to withstand corrosive substances, making

FTTH cables are particularly well-suited for use in the chemical industry.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.



Power	Distance between 2 consecutive contact points	Max. circuit length	Max. maintenance temperature
20 W/m	0.7 m	140 m	150°C
30 W/m	0.7 m	120 m	140°C
40 W/m	0.6 m	100 m	120°C

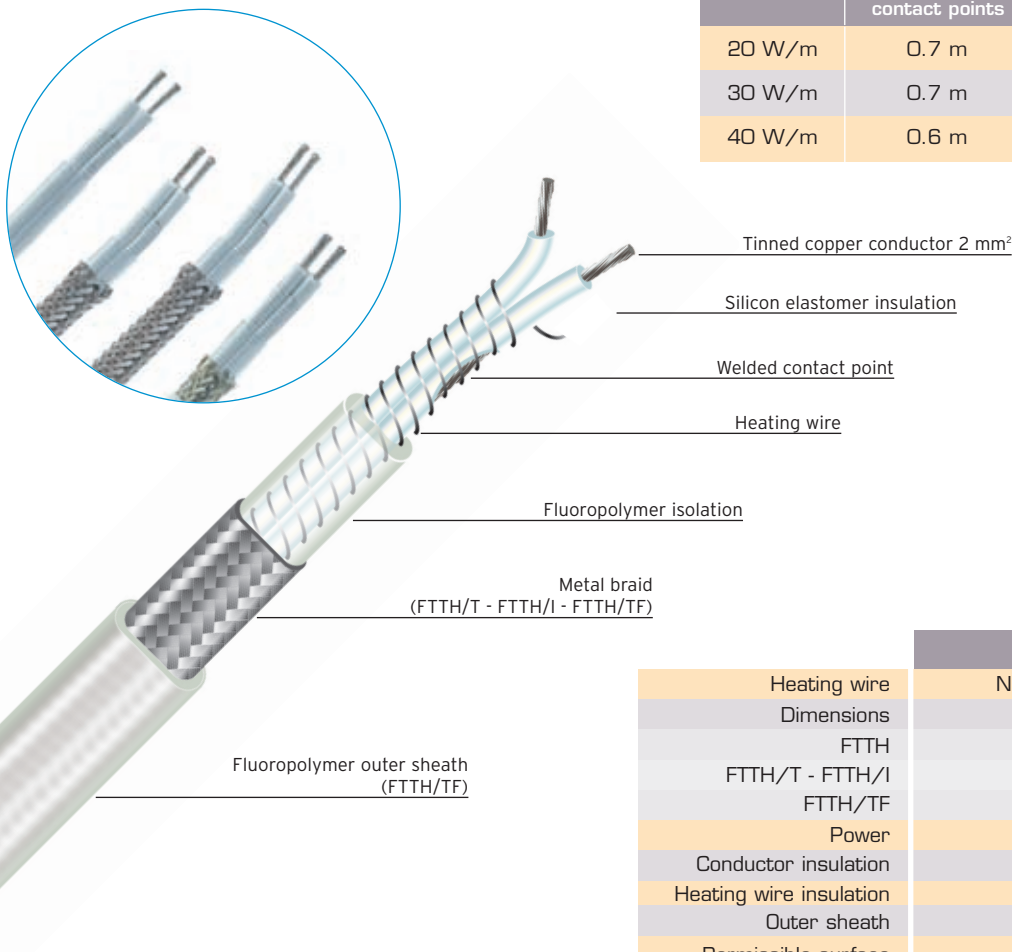

	FTTH
Heating wire	Nickel-Copper or Nickel-Chrome
Dimensions	
FTTH	5 x 8 mm
FTTH/T - FTTH/I	5.5 x 8.5 mm
FTTH/TF	6 x 9 mm
Power	20, 30 or 40 W/m
Conductor insulation	Silicon elastomer
Heating wire insulation	Fluoropolymer
Outer sheath	Fluoropolymer
Permissible surface temperature	from - 70°C to + 200°C

#### Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

#### FLEXELEC S.A.S

10, rue des frères Lumière  
Z.A. du Bois Rond  
69720 ST BONNET DE MURE - FRANCE  
Tel: + 33 (0)472.48.30.90  
Fax: + 33 (0)478.40.82.81  
E-mail: flexelec@omerin.com

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
51 Goldhill Plaza #08-12/01  
SINGAPORE 308900  
Tel: + 65.6255.4778  
Fax: + 65.6255.4779  
E-mail: sales@omerin.com.sg

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
Primrose Hill - KINGS LANGLEY  
Hertfordshire - WD4 8ST - UK  
Tel: + 44 (0) 1923.274477  
Fax: + 44 (0) 1923.270264  
E-mail: sales@omerin.co.uk

#### FLEXELEC Dept

OMERIN GmbH  
Buchwiese 16  
D-65510 IDSTEIN - GERMANY  
Tel: + 49 (0) 6126.94.31-0  
Fax: + 49 (0) 6126.83.99  
E-mail: omeringmbh@omerin.com