

CSC2

Silicon elastomer insulated drain-line heaters



Characteristics

- Fully sealed.
- Double insulation.
- Extremely flexible.
- Voltage 230 V as standard.
- Power cable: length 1 m.




Applications

CSC2 heaters are designed to be laid inside pipes for draining water from thawing refrigeration equipment installed in cold rooms. They operate only during thawing cycles.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

Note: The most commonly used power rating is 50 W/m. However, for plastic pipes, we strongly recommend using the 40W/m range.

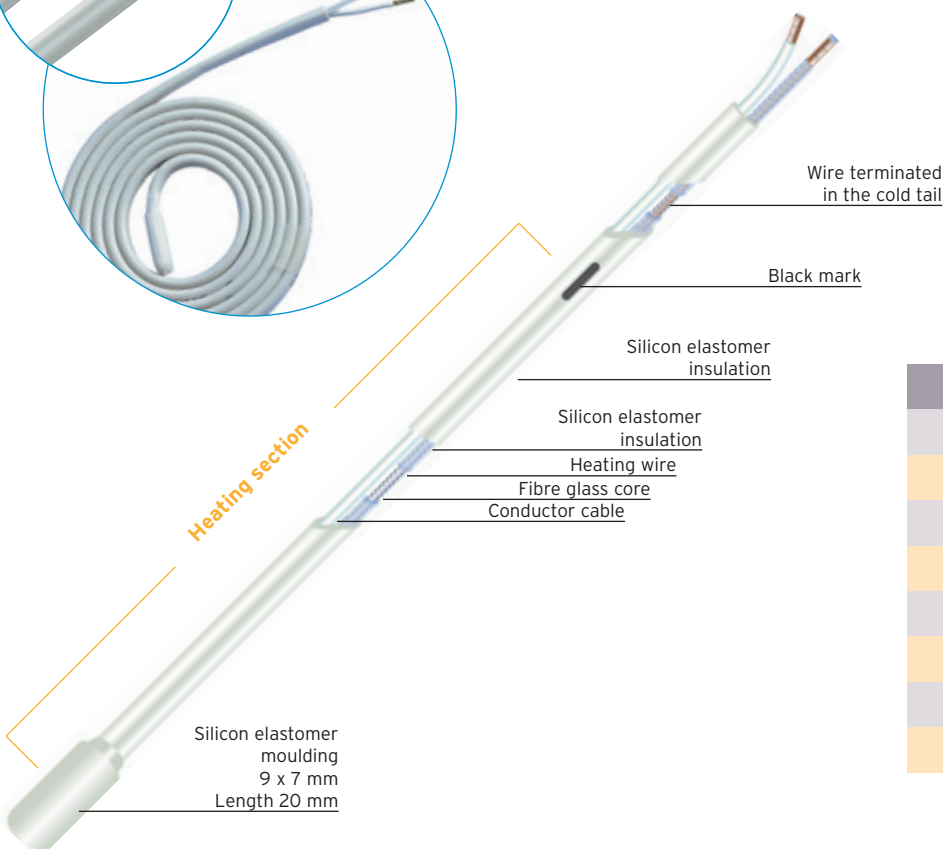

Standard models

Length (m)	CSC2	
	40 W/m	50 W/m
1	40 W	50 W
1.3	52 W	65 W
1.5	60 W	75 W
2	80 W	100 W
3	120 W	150 W
4	160 W	200 W
5	200 W	250 W
6	240 W	300 W

	CSC2
Heating wire	Nickel-Chrome or Nickel-Cuivre
Insulation	Silicon elastomer
Section	5 x 7 mm
Power	40 or 50 W/m
Voltage	Standard 230 V
Permissible surface temperature	from - 70°C to + 200°C
Tolerances	Power: ± 10 % Section: + 0.2 / - 0.1 mm Length: ± 1 %

→ Caution

These cables must never be cut to shorten the cold tail.

Use

Drain-line cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tel: + 33 (0)4.72.48.30.90
Fax: + 33 (0)4.78.40.82.81
E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-12/01
SINGAPORE 308900
Tel: + 65.6255.4778
Fax: + 65.6255.4779
E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel: + 44 (0) 1923.274477
Fax: + 44 (0) 1923.270264
E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Tennweg 2 B
D-65510 IDSTEIN - GERMANY
Tel: + 49 (0) 6126.94.31-0
Fax: + 49 (0) 6126.83.99
E-mail: omeringmbh@omerin.com